Air King Ventilation Products®

SPECIFICATIONS
AD SERIES
RANGE HOODS

Advantage Series Ductless Range Hood
120 Volts, 2.1 amps, 60 hz.

- **Dimensions**
  Overall bottom projection - 18 3/8"
  Overall top projection -12"
  Height - 6". Available widths: 21", 24", 30" & 36"

- **Hood Body**
  23 gauge cold rolled steel, auto welded, coated with a baked enamel finish.

- **Motor**
  2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz., 2.1 amps. Complete with 200°C lead wires.

- **Lighting**
  Single 60 watt cook light capacity (bulb not included).

- **Ducting Options**
  Ductless - combination grease/charcoal filter included. (Model RF55)

- **Fan Blade**
  One piece polymeric, electronically balanced blade. 6 5/8" diameter with 5 paddles.

- **Electrical connection**
  Hood top - 7/8" electrical knockout.
  Hood back - 7/8" electrical knockout.

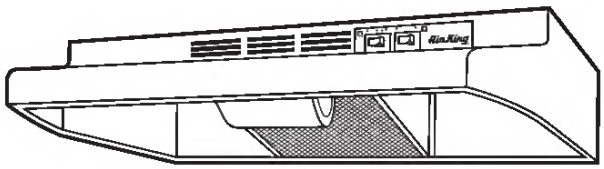

AD SERIES

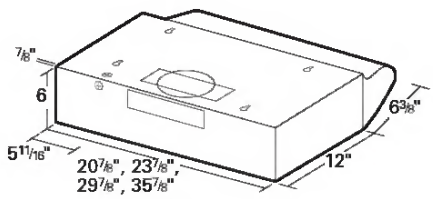

- **Filters**
  UL rated, class 2 filter.
  Combo Grease/Charcoal: RF55 - 8 7/8"x10 3/8" (included).

- **Available Finishes**
  White, Biscuit, Almond, Black & Stainless Steel.

PROJECT		ARCHITECT							
LOCATION		ENGINEER							
CONTRACTOR		SUBMITTED BY		DATE					
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine